



**POWER ELECTRONICS**<sup>®</sup>

# LOW VOLTAGE

V5•V2

ELECTRONIC  
SOFT STARTERS







# Contents

<b>Page 10</b>	<b>V5 Soft starter</b>
Page 12	Discovering V5 Series
Page 20	Applications
Page 22	Technical characteristics and Configuration table
Page 24	Standard ratings
Page 26	Power wiring, Dimensions and Accessories
<b>Page 28</b>	<b>V2 Soft starter</b>
Page 30	Discovering V2 Series
Page 32	Technical characteristics and Power wiring
Page 33	Standard ratings, Dimensions and Control
<b>Page 34</b>	<b>Warranty</b>
<b>Page 35</b>	<b>Contact</b>

# ABOUT US

Since our inauguration in 1987 Power Electronics' strategy of continuous innovation in product development has realized an extensive range of AC variable speed drives and soft starters in low and medium voltage and utility scale solar inverters.

The expertise and know-how gained over more than 30 years in the business is demonstrated in the unique features and patented designs of our products, coupled with the shortest lead-times and unbeatable 24/7 Power On Support has consolidated Power Electronics' position as a global market leader in the AC drive and soft starter business.




**INDUSTRIAL DIVISION**  
VARIABLE SPEED DRIVES  
ELECTRONIC SOFT STARTERS

**SOLAR DIVISION**  
SOLAR INVERTERS  
SOLAR POWER STATIONS



**+45**  
countries

Financial stability and strength

 SUSTAINABLE GROWTH

**+30** years

of product  
excellence and  
diversification



**T**he most complete range of  
variable speed drives and soft starters

**0.4kW - 6000kW**

**0.23kV - 13.8kV**




Product and Factory independent  
Reports and Certifications

— Engineered for reliability


— **3** year warranty:  
Industrial products





## Power electronics experts

Power Electronics projects often require customer specific solutions, for this reason our clients also have our Engineering and Consulting department at their disposal, which comprise a wide number of highly skilled and experienced engineers that are available to modify our standard product to suit customer demands and ensure our clients get the product they need.

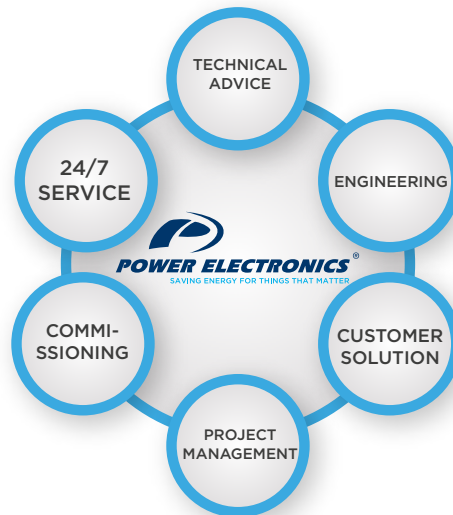




## Power on Support customer oriented strategy

Power on Support is the concept of a customer oriented strategy implemented by Power Electronics since its origins more than 25 years ago with 24/7 after sales service available for all our customers and end users without the need of signing an O&M contract.

ENGINEERING SUPPORT  
24/7 CUSTOMER SUPPORT  
24/7 ONSITE ASSISTANCE  
COMMISSIONING SUPPORT  
TRAINING SEMINARS  
3 YEAR WARRANTY





UNITED STATES

UNITED KINGDOM

SPAIN

MEXICO

PANAMA

COLOMBIA

MOROCCO

CHILE

PERU

BRAZIL

SOUTH AFRICA



power-electronics.com

in   





## V5 ➤

# LOW VOLTAGE ELECTRONIC SOFT STARTER



p. 10


## V2 ➤

# LOW VOLTAGE ELECTRONIC SOFT STARTER



p. 28



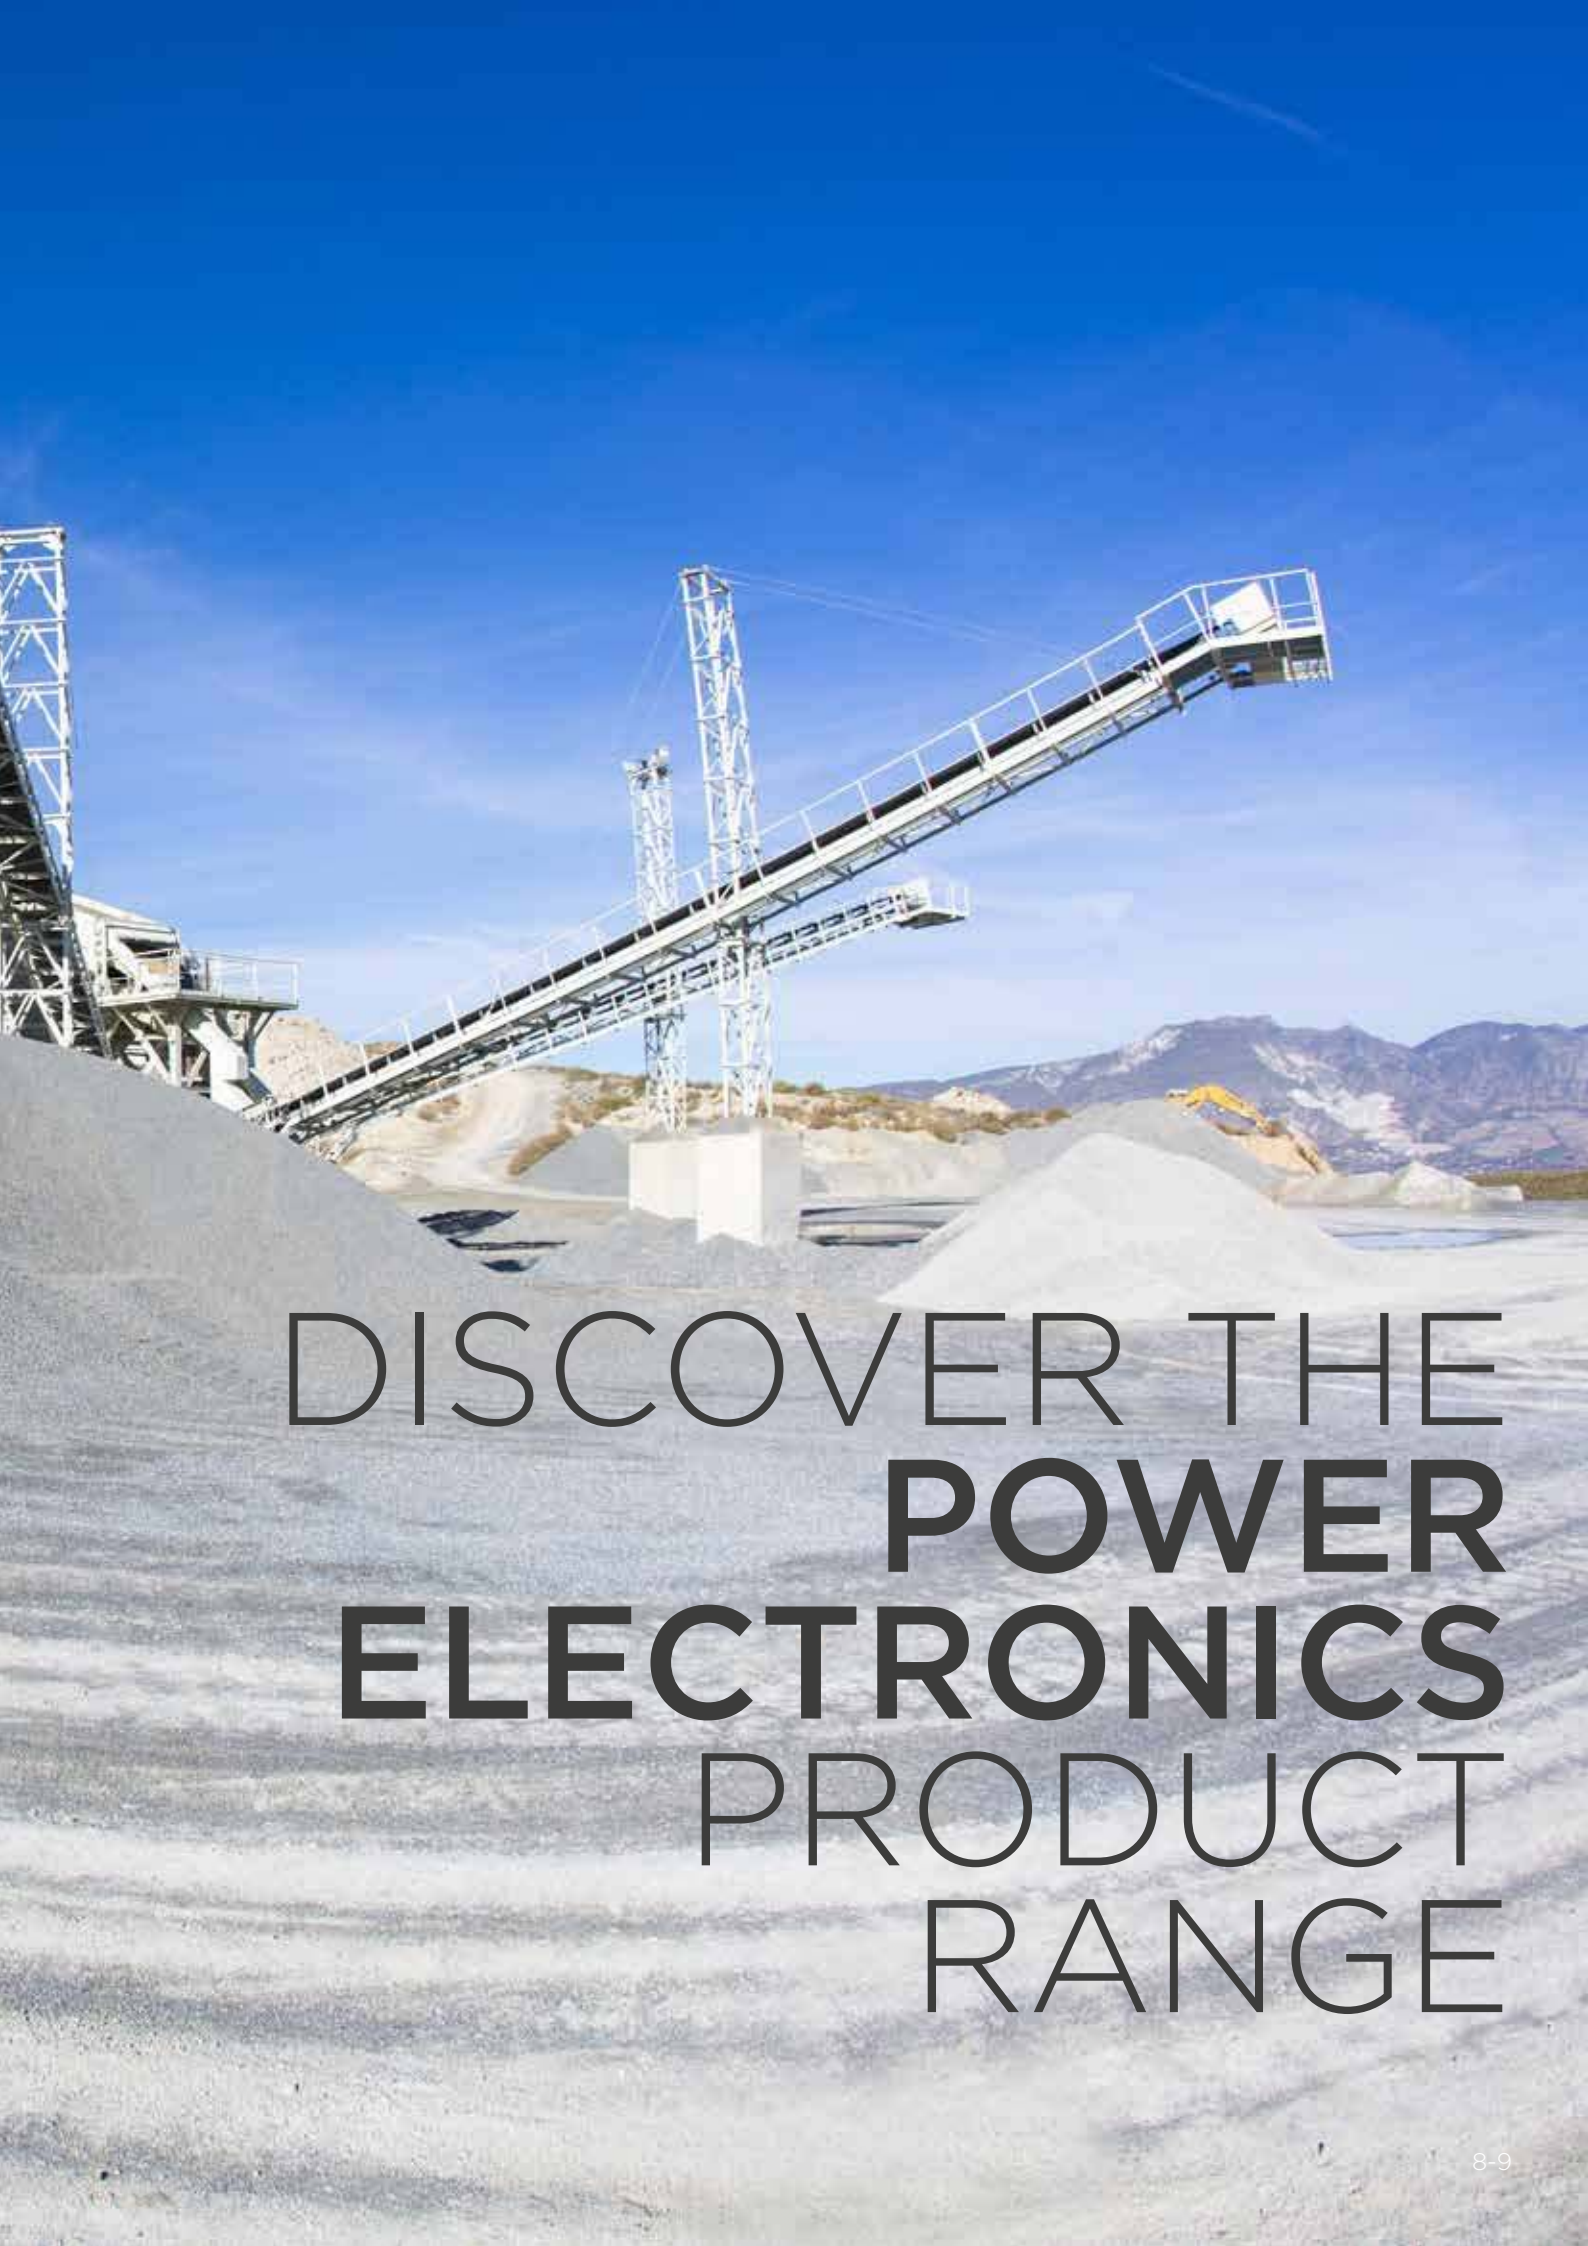

DISCOVER THE  
**POWER**  
**ELECTRONICS**  
PRODUCT  
RANGE



# V5

## ELECTRONIC SOFT STARTER



## V5 SERIES

The V5 Series soft starters are Power Electronic's fifth generation, ranging from 2kW to 1500kW. An electronic starter with the most advanced control systems and voltage during motor starting and stopping, ensuring the best performance for any industrial application.

Motors are the driving force of the industry and to protect them, the V5 series integrate protections that allow a thorough diagnosis of your motor and its application. The V5 series are engineered and manufactured under the most demanding quality controls, offering a rugged mechanical design and top class hardware and software performance to those applications that run under harsh environments.

QUALITY AND RELIABILITY  
FOR THE MOST DEMANDING  
APPLICATIONS

- VOLTAGE RANGE FROM 230V-1000V AND POWER FROM 2KW TO 1500KW
- BUILT-IN MOTOR PROTECTIONS
- CONFORMAL COATED ELECTRONICS AND OPERATING TEMPERATURE OF UP TO 50°C
- HIGHEST BREAK AWAY TORQUE
- 3 WIRES OR 6 WIRES (DELTA) CONNECTION
- BUILT-IN OR EXTERNAL BYPASS
- 3 YEAR WARRANTY AND 24H SERVICE AND REPLACEMENT COMMITMENT

### EASY FRONT ACCESS AND INSTALLATION

Its metallic cabinet enclosure simplifies the installation and enables easy access to the control and power terminals, electronic boards, bypass contactors and cooling fans. With its vertical cooling system the user can install multiple units in the same cabinet.

### DYNAMIC TORQUE CONTROL

The V5 Series integrates a "Dynamic Torque Control", an exclusive starting mode from Power Electronics, that optimises starting and stopping sequences, smoothing the current peaks and the mechanical requirements of the applications.



### CONTROL FLEXIBILITY

Programming by the local display unit or PC (PowerCOMMS Program). Two analogue and five digital inputs, three relays and one analogue output provide the V5 with many possibilities of control.

RS232/RS485 serial communications and Modbus are built-in.

Profibus and DeviceNet protocols are available.

### RELIABILITY

25 years of evolution and field testing have gone into the V5 soft starter, and in conjunction with our technical service assistance, we guarantee the maximum availability of these units, in the harshest conditions.

Overload, underload, phase sequence, sequence imbalance, rotor locked, shearpin current, phase imbalance, are some of the motor protections functions embedded in the V5 as standard.



## EXTERNAL OR BUILT-IN BYPASS

The V5 softstarter offers both possibilities. The user can select the standard model that offers the possibility to install an external contactor to bridge the power stage once the acceleration ramp is finished, and re-engages for the deceleration ramp.

Otherwise the user can choose the V5 model with built in bypass which offers the same functionality without requiring any external installation.

## 3 WIRES AND 6 WIRES (DELTA) CONNECTION

The 5<sup>th</sup> generation of the V5 series enables 3 wires or 6 wires (delta) connection that can down-size the unit to 30% in certain applications.

## BUILT-IN MONITORING

V<sub>RS</sub>, V<sub>ST</sub>, V<sub>TR</sub>, I<sub>R</sub>, I<sub>S</sub>, I<sub>T</sub>, Cos phi, Power (kW), Frequency (Hz), Energy kW/h. Maximum motor care and protection of the application.

## STRONG AND EASY TO OPERATE

Unique control board. Conformally coated electronics.

## PERMANENT INFORMATION

The V5 series display constantly motor status and complete information of the installation where it is integrated. The user has access locally (keypad unit) or remote (serial communications) to the following information:

- Voltage in each phase
- Number of starts
- Total and Partial
- Power (kW) and current (A) in each phase
- Analogue input/output status
- Motor phi cosine (Power Factor), digital input/output status
- Motor shaft torque,
- Timer total and partial
- Fault history (5 most recent fault).








### INDICATING LEDS

- ON** Indicate power in the control board.
- RUN** Flashing: Accelerating/Decelerating.  
Lighting: The motor is running at nominal speed.
- FAULT** The V5 has tripped on fault protection.

### LCD DISPLAY

- STATUS LINE** - Top.
- CONTROL LINE** - Bottom.

### CONTROL KEYPAD

-  To unfold the screen groups.
-  To scroll between screen groups.
-  To scroll between screen groups.
-  Motor start.
-  Motor Stop/Reset.




# Multiple features

A high investment in the development of control software has led to the most accurate, powerful and flexible performance.




The V5 soft starter gets the most from your facilities, by implementing the unique dynamic torque control algorithm (CDP) that offers an ultimate break away torque and starts the most demanding applications. Some of the starting and stopping extended settings are:

## STARTING MODES

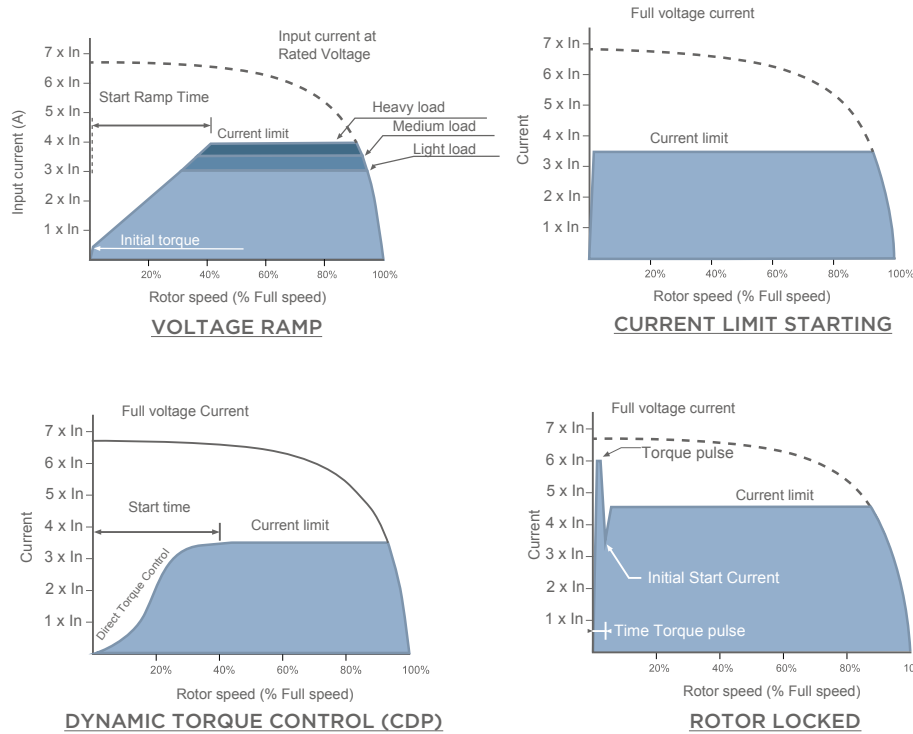

## STOP MODES

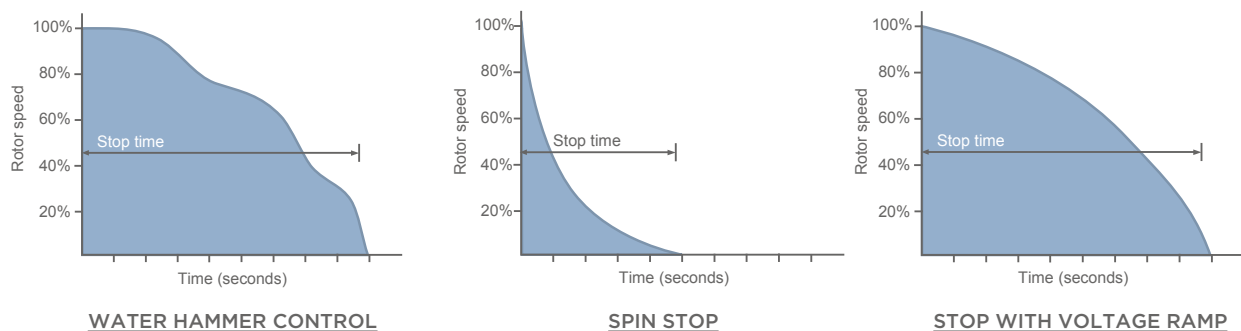

## THE DUAL SETTING FUNCTION


The V5 soft starter offers a double independent setting of the start and stop parameters, which permits the soft starter to shift performance according to the conditions: loaded or unloaded, raw material conditions, static pressure, temperature variations, blocked shaft, etc... the V5 control allows advanced users to adjust: torque pulse duration, break away torque and time, current limit, stop time, level and time of the overload and underload protections, i2t overload curve, number of start per hour, minimum speed and water hammer control algorithm.

GET THE MOST OF YOUR  
APPLICATION WITH THE DUAL  
SETTING FUNCTION



## SLOW SPEED

The V5 Series allow adjusting torque to slow speed driving backward or forward (JOG FUNCTION). This slow speed will be active during the time assigned before acceleration ramp or after stop deceleration. Load and download of centrifuges or mixing, machine positioning or unblocking pumps are some of the applications of JOG Function.


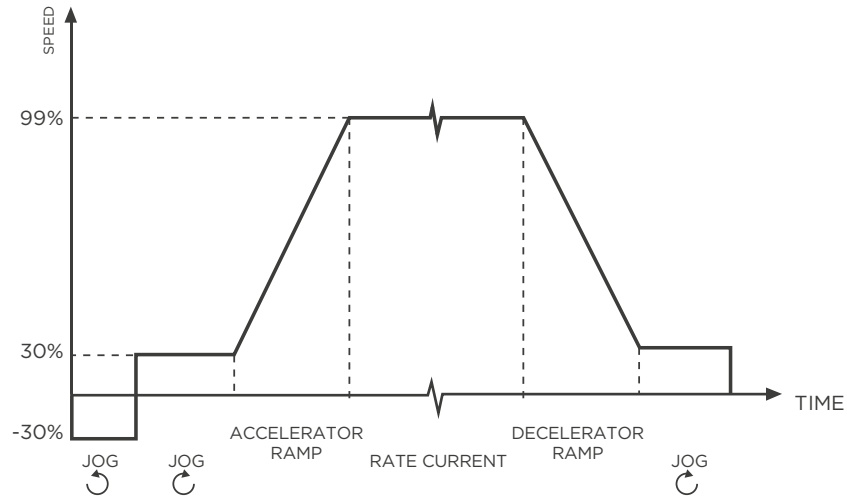


## DC BRAKE

In some applications, specially in high load inertia machines, DC injection with a precise torque is possible with V5 soft starter during the time needed for each application.

## FULL PROTECTIONS

- Input phase sequency
- High input voltage
- Low input voltage
- Start current limit
- Overlock rotor
- Motor overload
- Motor underload
- Motor overtemperature PTC
- Shearpin Current
- Unbalanced phases
- Phase Sequence
- Maximum number of starts per hour
- Thyristor fault
- Equipment temperature

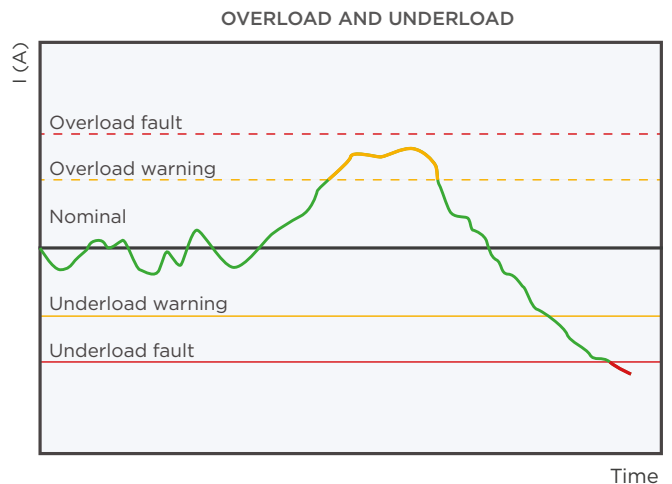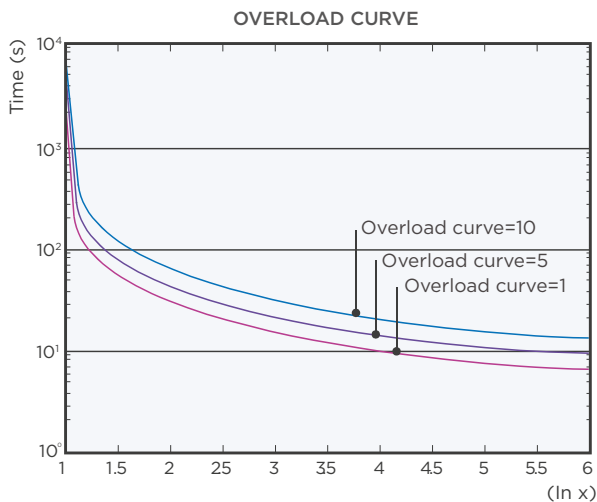


## BUILT-IN AND EXTERNAL BYPASS


The bypass is activated after reaching the nominal speed and provides a yield of 100% because switching losses and heat dissipation in thyristors are removed from the circuit maximising savings. All protections and functionalities continue to be active with the starter in bypass.

The V5 soft starters are equipped with additional terminals for the easy connection of an external bypass contactor. If you prefer, you can select the integrated bypass, simplifying the external hardware with consequent savings in installation time and wiring.


### V5 - EXTERNAL BYPASS

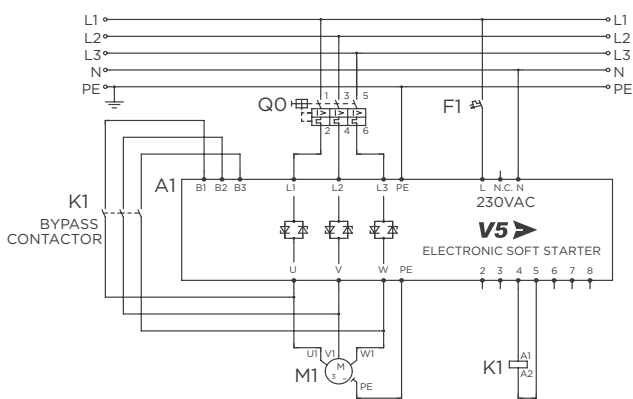

### V5 - BUILT-IN BYPASS

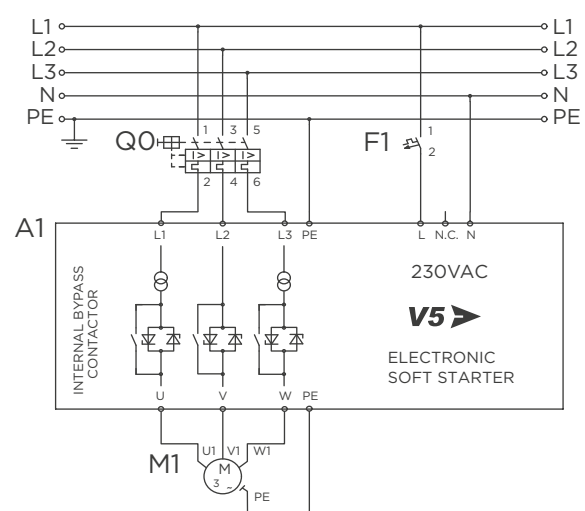

### V5 - 6 WIRES - BUILT-IN BYPASS

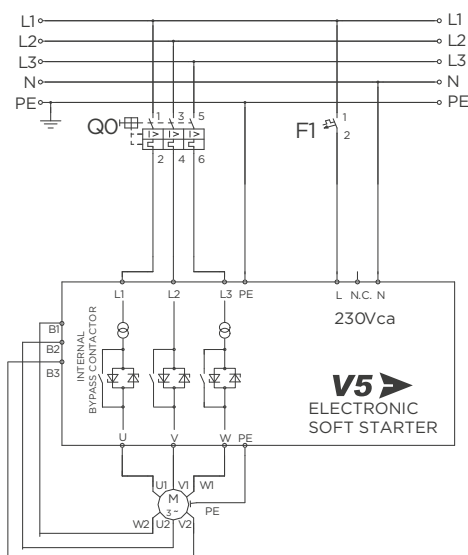

ALL PROTECTIONS  
AND FUNCTIONALITIES  
CONTINUE TO BE ACTIVE  
WITH THE DRIVEN  
BYPASS, BUILT-IN OR  
EXTERNAL



## **CONFORMAL COATING**

The PCB coating protects the micro lead components that are vulnerable to dust, moisture, pollution (PD3) and corrosive gasses 3C3 bulid up. Which can produce conductive paths that can result in pins short circuiting. Power Electronics designs are dedicated to harsh environments thus PCBs cards are fully coated with the latest high military and aerospace technology (IEC61086-1:2004,-3-1).

## **EMC METAL CABINET**

Design metal enclosure improves EMC, obtaining maximum immunity and minimum emissions.

## **THYRISTORS OVERSIZED UP TO 450%**

Allows its installation in applications with high starting torque and overload.



HIGH MILITARY AND  
AEROSPACE TECHNOLOGY  
CONFORMAL COATING ON  
ALL ELECTRONIC BOARDS  
(IEC61086-1:2004,-3-1)

## COMMUNICATIONS

Modbus-RTU over serial communication (RS232/RS485) built-in as standard, optionally communications gateways are available: Ethernet TCP/IP, Profibus-DP, N2 Metasys and DeviceNet.

**PROFIPOWER.** Modbus RTU (RS485) to Profibus-DP (9-pinD-SUB/F). Communication speed max 12MB, Profibus cable recommended.

**POWERNET.** Communications gateway is available: Modbus TCP, Devicenet and CANopen.

### *DEVICENET*

DeviceNet (CAN) to Modbus RTU (RS485). 31 max. nodes. Asynchronous communication control mode. Half Duplex Communication System, Transmission Type: Bus method, Multi drop link system. Communications speeds: 125kbps, 250kbps, 500kbps, 1000kbps. Transmission distance max. 500m . (125kbps Devicenet cable).

### *ETHERNET*

Modbus TCP (Ethernet) to Modbus RTU (RS485). Communication System: Half Duplex, Full Duplex. CSMA/CD communication method. Communication speed: 10Mbps, 100Mbps.

### *CANOPEN*

CANOpen (CAN) to Modbus RTU (RS485) communication speed 50kbps, 250kbps, 500kbps, 1Mbps. 31 max. nodes. Transmission distance max. 500m. available with SDO y PDO.







PUMPING



VENTILATION

# Pumping and ventilation

In pumping systems, the V5 also offers functions such as water hammer surge control stop, to gradually reduce the flow and avoid mechanical stress on valves and pipes. Besides, there are an underload function which determines when the pump is working without water, or overload function which is activated when possible clogging has occurred. There are also some protections available in the special menu for pumping control. The JOG function enables slow speed in the forward or reverse direction for a possible unblock.


In fan applications, the soft starter is used to limit input current and to reduce mechanical and electrical stress preventing slipping belts. If a fan is rotating in the wrong direction when starting, the V5 slows down the speed until it stops and then it starts in the right direction avoiding surges and mechanical tension. The direction of the starting is always under control.

The V5 starter has been designed to operate under the harshest environments with fully coated electronics and high operating temperature.

Its design is optimal for waste water treatment plant (WWTP), drinking water treatment stations, desalination plants, watering stations, tunnels and mines extractions, etc.





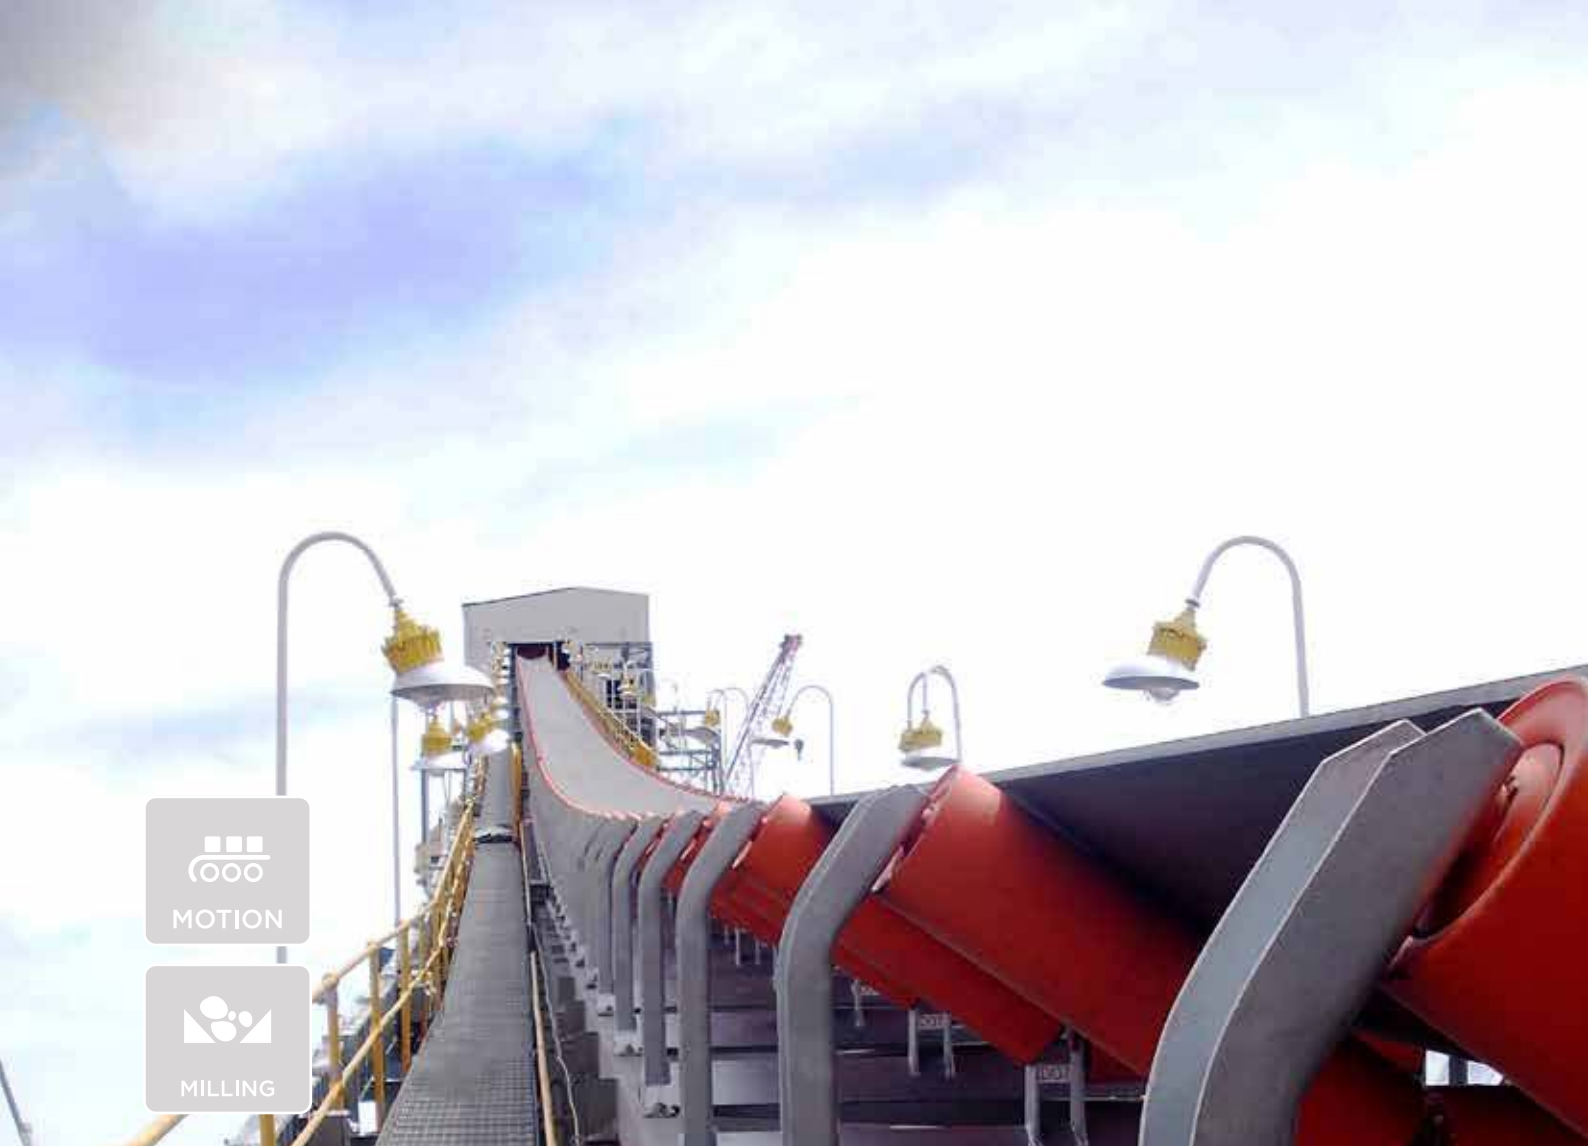

# Mills, crushers and conveyors

When controlling conveyor belts, crushers and conveyors, any overload or underload situation that could cause inefficiency or damage, is detected immediately by the V5 to avoid potential problems.

In addition, in crushers or mills, the torque pulse provides an additional overload that allows starting even if the load torque is high. Once this function completes, the starting continues according to the selected starting method. The PTC signal prevents the motor from overheating in applications with a high duty cycle.

The slow speed or JOG function, in forward or reverse can be useful for aligning a load or to allow a slow speed for performing maintenance tasks or testing.

Overall, our equipment is ready when needed, when a high starting torque is required without mechanical shock, smooth acceleration without overload, even when the machines is being charged with a very high torque, providing minimal mechanical stress.





## TECHNICAL CHARACTERISTICS

<b>INPUT</b>	Input voltage	(3 phase) 230-500V (-20% to +10%) (3 phase) 690V (-20% to +10%) (3 phase) 1000V (-20% to +10%)
	Current range	9A to 1500A
	Supply frequency	47 to 62 Hz
	Control voltage	230V ±10%, others under demand
<b>OUTPUT</b>	Connection	3 wires / 6 wires (Delta) <sup>[1]</sup>
	Output voltage	0 to 100% Supply voltage
	Output frequency	Same as the input
	Efficiency (at full load)	>99%
<b>ENVIRONMENTAL CONDITIONS</b>	Ambient temperature	Minimum: 0°C / Maximum: +50°C
	Storage temperature	-10°C to +70°C
	Ambient humidity	< 95%, non-condensing
	Altitude losses	>1000m, 1% each 100m; 3000m max
	Protection degree	IP20
<b>MOTOR PROTECTIONS</b>	Degree of pollution	Degree of pollution 3
	Input phase missing	
	Low input voltage	
	High input current	
	Starting current limit	
	Rotor locked	
	Underload	
	Motor overtemperature (PTC, normal status 150R-2K7)	
	Number of start / hour	
	Motor overload (thermal mode)	
	Phase unbalance	
Shearpin current		
<b>SOFT STARTER PROTECTIONS</b>	Thyristor fault	V5 over temperature
	For additional information consult the technical manual	
<b>ADJUSTMENTS</b>	Torque pulse	
	Initial torque	
	Initial torque time	
	Current limit: 1 to 5 I <sub>n</sub>	
	Acceleration time	
	Deceleration time / Freewheel stop	
	Slow speed (1/7 fundamental frequency)	
	Number of starts/hour allowed	
	Water hammer surge control stop	
	Overload: 0.8 to 1.2 I <sub>n</sub> , Overload slope: 0 to 10	
	DC braking	
Dual setting		
Torque control		
<b>INPUT AND OUTPUT SIGNALS</b>	2 analogue inputs, 0-20mA or 4-20mA, 0-10V	5 configurable digital inputs
	1 PTC input	3 changeover output relays (10A 250Vac non inductive)
	1 analogue output 0-20 mA or 4-20mA	
<b>COMMUNICATIONS</b>	Physical level RS232/RS485	
	Modbus RTU Protocol	
<b>CONTROL</b>	Optional Protocol: Profibus-DP, DeviceNet, CANOpen, Modbus TCP-IP	
	Local via keypad	
	Communications (Modbus RTU, RS232/RS485)	
<b>LED'S INDICATIONS</b>	Remote via digital input	
	LED1 Green, voltage present on control board	
	LED2 Orange, Blinking: Motor accelerating / decelerating - On: Motor running	
<b>REGULATIONS</b>	LED3 Red, fault present	
	CE, UL, cUL, cTick.	

NOTE [1] Consult availability with Power Electronics.

## V5 - CONFIGURATION TABLE

V5	O275		.6		B		W	
V5 series	Output current <sup>[1]</sup>		Input voltage		Internal bypass		Connection	
V5	0009	9A	-	230-500V	-	Without internal bypass	-	3 wires
	0017	17A	.8	550V	B	With internal bypass	W	6 wires (Delta) <sup>[2],[3]</sup>
	...	...	.6	690V				
	1500	1500A	.10	1000V <sup>[2]</sup>				

NOTES [1] Check the rated current of the motor nameplate to ensure compatibility with the chosen softstarter.  
 [2] Consult availability and standard rating with Power Electronics.  
 [3] Only with internal bypass.

## V5 - CLASSIFICATION OF STARTERS

- A)** In the table below select the starting current depending on the application.  
**B)** Once the motor voltage (note whether or not with internal bypass) select the column for this current rate, 3xIn , 4xIn or 4.5xIn.  
**C)** Select the correct model considering power and rated current of the motor plate.

**EXAMPLE • Refiners Pumps, 400VAC, 83A, 45kW motor.** Characteristics starting of Refining Pump if 10 startings per hour, 50 % duty cycle, 50°C and altitude ≤ 1000m: 4.0xIn.  
 Look at 400VAC table, equipment with bypass, select the column to select 4xIn power 45kW. The starter V50075B with a rated current of 85A is suitable for this application.

## V5 - STARTING CURRENTS

COMMON APPLICATIONS	CHARACTERISTIC STARTING CURRENT
<b>GENERAL</b>	
Hydraulic Equipment	3.5 x In
Agitators	4.0 x In
Compressors (Screw compressor, without load)	3.0 x In
Compressors (Reciprocating compressors, without load)	4.0 x In
Conveyors	4.0 x In
Mixers	4.5 x In
<b>WATER AND WASTE WATER</b>	
Centrifugal Pumps	3.0 x In
Mono and High Pressure Pumps	4.0 x In
Multistage Pumps	4.0 x In
Vertical Pumps	3.0 x In
Split Chamber Pumps	3.5 x In
Submersible Pumps	3.5 x In
<b>VENTILATION</b>	
Fans (extraction)	3.5 x In
Fans (fresh air)	4.5 x In
Condenser Fans	3.5 x In
Climatization Turbine	4.5 x In
<b>PULP AND PAPER INDUSTRY</b>	
Refiner Pumps	4.0 x In
Pulp Pumps	4.0 x In
Vacuum Pumps	4.0 x In
Pulp Machines	4.5 x In
Trommels	4.0 x In
Pulp Mixers	4.0 x In
Filters	4.0 x In
<b>METALS, AGGREGATES AND MINERALS</b>	
Dust Filters Fans	3.5 x In
Conveyor Belts	4.5 x In
Crushers	3.0 x In
Hammer Mills	4.5 x In
Jaw Crushers	4.0 x In
Rotor Bar Mills	4.5 x In
Ball Mills	4.5 x In
Secondary Mills and Sand Pulverizers	3.5 x In
Eccentric Feeder	4.5 x In
Trommels	4.0 x In
Vibrators	4.0 x In
Separators	4.0 x In
Feeders	3.5 x In

COMMON APPLICATIONS	CHARACTERISTIC STARTING CURRENT
<b>FOOD INDUSTRY</b>	
Air Compressors	4.0 x In
Sorters	3.5 x In
Bottle Wash Machines	3.0 x In
Driers	4.5 x In
Centrifuges	4.0 x In
Crushers, punchers	4.5 x In
Palletizers	4.5 x In
Separators	4.5 x In
Cutters	3.0 x In
Material Handling	3.5 x In
<b>TOOLING MACHINES</b>	
Arm Saws	4.5 x In
Buzz Saws	3.5 x In
Stamping Presses	4.5 x In
Crumbing Machines	3.5 x In
Chamfering Tools	3.5 x In
Flatters	3.5 x In
Sanding Machines	4.0 x In
Lathes	4.5 x In
Crusher Machines	3.5 x In
Palletizers	4.5 x In
Presses	4.0 x In
Turn Tables	4.0 x In
Transporters	4.0 x In
<b>PETROCHEMICAL</b>	
Centrifugal Machines	4.0 x In
Screw Pumps	4.0 x In
Gas Pumps (propane, butane, ...)	3.0 x In
Crude Oil Extraction Pumps	4.5 x In
Crude Oil Transfer Pumps	4.5 x In
Hydrocarbon Transfer Pumps (liquid stage)	3.5 x In
Transport and Packaging	3.5 x In
Conveyors	3.5 x In



# V5

## STANDARD RATINGS

### STANDARD V5 SOFT STARTER

230V to 500V (-20% to +10%)						
FRAME	CODE	Rated I(A)	Power motor until (kW)			
			230V	400V	440V	500V
1	V50009	9	2	4	5	5.5
	V50017	17	5	7	9	11
	V50030	30	9	15	18.5	18
	V50045	45	14	22	25	30
	V50060	60	18	30	35	40
	V50075	75	22	37	45	50
	V50090	90	25	45	55	65
2	V50110	110	35	55	65	80
	V50145	145	45	75	90	100
	V50170	170	50	90	110	115
	V50210	210	65	110	120	150
	V50250	250	75	132	160	180
3	V50275	275	85	150	170	200
	V50330	330	100	185	200	220
	V50370	370	115	200	220	257
	V50460	460	145	250	270	315
4	V50580	580	185	315	375	415
	V50650	650	200	355	425	460
	V50800	800	250	450	500	560
	V50900	900	280	500	560	630
	V51000	1000	322	560	616	700
5	V51200	1250	400	710	800	900
	V51500	1500	500	800	900	1100

690V (-20% to +10%)			
FRAME	CODE	Rated I(A)	Power motor until (kW)
			690V
1	V50009.6	9	7.5
	V50017.6	17	15
	V50030.6	30	30
	V50045.6	45	45
	V50060.6	60	60
	V50075.6	75	75
	V50090.6	90	90
2	V50110.6	110	110
	V50145.6	145	140
	V50170.6	170	160
	V50210.6	210	200
	V50250.6	250	230
3	V50275.6	275	250
	V50330.6	330	315
	V50370.6	370	355
	V50460.6	460	450
4	V50580.6	580	560
	V50650.6	650	630
	V50800.6	800	800
	V50900.6	900	900
	V51000.6	1000	960
5	V51200.6	1250	1250
	V51500.6	1500	1500

NOTES

- The values of the tables are valid for 4-pole AC motors.
- For current values which are not in accordance with the values in these tables, please contact Power Electronics.
- For higher power ratings, contact to Power Electronics customer support.
- Classification of soft starters according to UNE-EN60947-4-2. 10 starts per hour, 50% duty cycle, 50°C and altitude<1000m.

## V5 SOFT STARTER WITH BUILT IN BYPASS

400Vac (-20% to +10%)							
FRAME	CODE	Starting current 3.0xIn		Starting current 4.0xIn		Starting current 4.5xIn	
		Max. Rated I(A)	Motor power (kW) at 400Vac	Max. Rated I(A)	Motor power (kW) at 400Vac	Max. Rated I(A)	Motor power (kW) at 400Vac
1	V50009B	14	7.5	10	5.5	9	4
	V50017B	26	15	19	11	17	7.5
	V50030B	45	22	34	18.5	30	15
	V50045B	68	37	51	30	45	22
	V50060B	90	45	68	37	60	30
	V50075B	113	55	85	45	75	37
	V50090B	135	75	101	55	90	45
2	V50110B	165	90	140	75	110	55
	V50145B	218	110	164	90	145	75
	V50170B	255	150	192	110	170	90
	V50210B	315	185	237	132	210	110
	V50250B	375	200	281	150	250	132
3	V50275B	412	220	310	185	275	150
	V50330B	495	280	370	200	330	185
	V50370B	555	315	416	220	370	200
	V50460B	690	400	518	280	460	250
4	V50580B	870	450	650	355	580	315
	V50650B	975	500	731	400	650	355
	V50800B	1200	630	900	500	800	450

500Vac (-20% to +10%)							
FRAME	CODE	Starting current 3.0xIn		Starting current 4.0xIn		Starting current 4.5xIn	
		Max. Rated I(A)	Motor power (kW) at 500Vac	Max. Rated I(A)	Motor power (kW) at 500Vac	Max. Rated I(A)	Motor power (kW) at 500Vac
1	V50009B	14	11	10	7.5	9	5.5
	V50017B	26	18.5	19	15	17	11
	V50030B	45	30	34	22	30	18.5
	V50045B	68	45	51	37	45	30
	V50060B	90	55	68	45	60	37
	V50075B	113	75	85	55	75	45
	V50090B	135	90	101	75	90	55
2	V50110B	165	110	140	90	110	75
	V50145B	218	150	164	110	145	90
	V50170B	255	185	192	132	170	110
	V50210B	315	220	237	185	210	150
	V50250B	375	250	281	200	250	185
3	V50275B	412	280	310	220	275	200
	V50330B	495	355	370	250	330	220
	V50370B	555	400	416	280	370	250
	V50460B	690	500	518	355	460	315
4	V50580B	870	560	650	450	580	400
	V50650B	975	630	731	500	650	450
	V50800B	1200	710	900	630	800	560

690Vac (-20% to +10%)							
FRAME	CODE	Starting current 3.0xIn		Starting current 4.0xIn		Starting current 4.5xIn	
		Max. Rated I(A)	Motor power (kW) at 690Vac	Max. Rated I(A)	Motor power (kW) at 690Vac	Max. Rated I(A)	Motor power (kW) at 690Vac
1	V50009.6B	14	15	10	11	9	7.5
	V50017.6B	26	22	19	18.5	17	15
	V50030.6B	45	45	34	37	30	30
	V50045.6B	68	75	51	55	45	45
	V50060.6B	90	90	68	75	60	55
	V50075.6B	113	110	85	90	75	75
	V50090.6B	135	132	101	110	90	90
2	V50110.6B	165	150	140	132	110	110
	V50145.6B	218	200	164	150	145	132
	V50170.6B	255	250	192	200	170	150
	V50210.6B	315	315	237	220	210	200
	V50250.6B	375	355	281	250	250	220
3	V50275.6B	412	400	310	315	275	250
	V50330.6B	495	450	370	355	330	315
	V50370.6B	555	500	416	400	370	355
	V50460.6B	690	630	518	500	460	450
4	V50580.6B	870	800	650	630	580	560
	V50650.6B	975	900	731	710	650	630
	V50800.6B	1200	1000	900	900	800	800

NOTES - Rated power and current at 400Vac, 500Vac and 690Vac (-20% to +10%) for motors at 1500rpm.  
 - The values of the tables are valid for 4-pole AC motors.  
 - For current values which are not in accordance with the values in these tables, please contact Power Electronics.  
 - For higher power ratings, contact to Power Electronics customer support.  
 - Classification of soft starters according to UNE-EN60947-4-2. 10 starts per hour, 50% duty cycle, 50°C and altitude < 1000m.


## CONFIGURATION CONTROL AND POWER WIRING

The V5 series include multiple control possibilities, not only due to a large number of inputs and outputs, but also for the versatility of the configuration of all of them.


### INPUT AND OUTPUT

Five digital multifunctions inputs, 2 analogue inputs and one digital input available and the 6<sup>th</sup> digital input is dedicated for the PTC input, 3 relay outputs and 1 analogue available.


**CONFIGURATION OF POWER WIRING FOR SOFTSTARTER WITH STANDARD BYPASS**

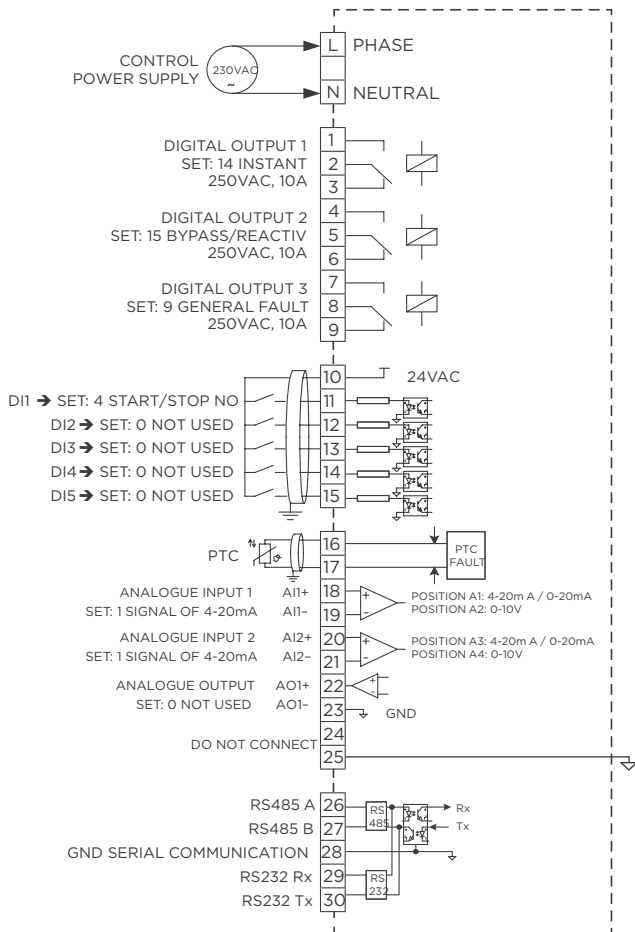


**CONFIGURATION OF POWER WIRING FOR SOFTSTARTER WITH INTERNAL BYPASS**

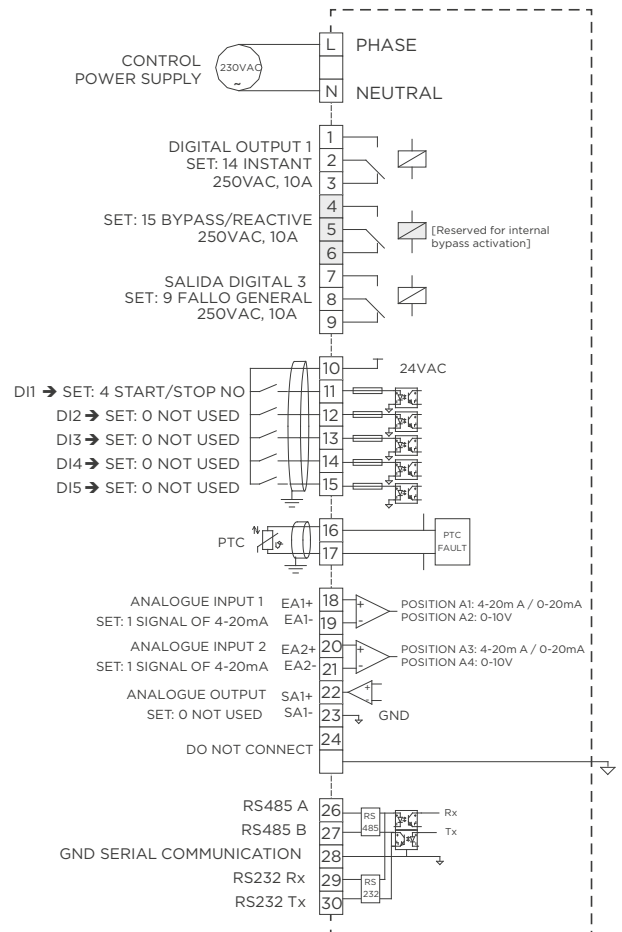


## DIMENSIONS




FRAME	WEIGHT (kg) Standard V5	WEIGHT (kg) Bypass V5
1	10	12




FRAME	WEIGHT (kg) Standard V5	WEIGHT (kg) Bypass V5
2	20	22



FRAME	WEIGHT (kg) Standard V5	WEIGHT (kg) Bypass V5
3	50	57



FRAME	WEIGHT (kg) Standard V5	WEIGHT (kg) Bypass V5
4	80	90



FRAME	WEIGHT (kg) Standard V5
5	310

## ACCESSORIES

CODE	ACCESSORIES DESCRIPTION
I001	Profipower Communication module
I004	PowerNET Communication module
PO015 <sup>[1][2]</sup>	Bypass Kit V50060-V50090
P054-005A <sup>[1][2]</sup>	Bypass Kit V50110-V50250
L051 <sup>[1]</sup>	Bypass terminal 9-17A
L057 <sup>[1]</sup>	Bypass terminal 30-45A

CODE	ACCESSORIES DESCRIPTION
V01	Display kit 2m extender with casing
V02	Display kit 1m extender with casing
V09	Display kit 3m extender with casing
V16	Display kit 5m extender with casing
MFV50275	DC braking module 275A

NOTES [1] Accesories for external bypass in standard V5 soft starter.  
[2] Each equipment needs three units.



# V2

## ELECTRONIC SOFT STARTER



## V2 SERIES

For over two decades, the V2 series is part of the family of Power Electronics' soft starters. It is a compact and efficient solution. It is equipped with an advanced control technology and motor protection. With coated electronics, the V2 is resistant in harsh environments. It has also been designed in two versions, IP00 and IP54 incorporating an integrated bypass that reduces wiring installation.

Features as underload and overload, two stopping options, by inertia or deceleration ramp and its compact size and multiple protections make this soft starter the optimum solution for many applications.

ROBUST, EASY AND  
COMPATIBLE WITH  
MULTIPLE APPLICATIONS

- VOLTAGE RANGE FROM 230V - 400V AND POWER FROM 2.2KW - 37KW
- MULTIPLE BUILT-IN MOTOR PROTECTIONS
- WIDE TEMPERATURE RANGE FROM 0° TO +50°C (IP54)/40°C (IP00)
- AVAILABLE WITH INTERNAL BYPASS
- MAXIMUM STARTING TORQUE IN MOTOR
- EASY ADJUSTMENT OF PARAMETERS USING POTENTIOMETERS
- 3 YEAR WARRANTY AND 24H SERVICE AND REPLACEMENT COMMITMENT


## V2 SERIES - TOPOLOGY

### WIDE POWER RANGE

Power from 2.2kW to 37kW, 220-400V. Giving your installation features that guarantee a safe operation.

### EASY INSTALLATION

Its compact size makes possible the installation of multiple softstarters in the same cabinet.

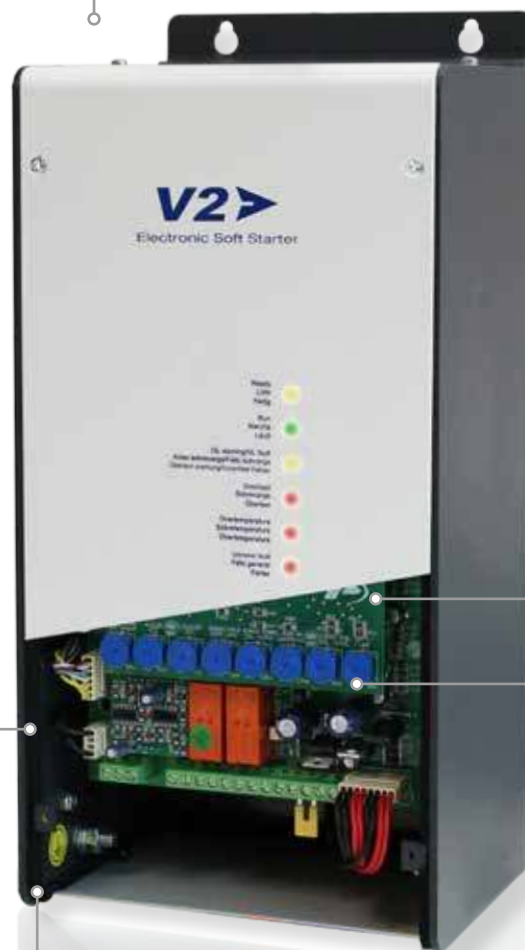

### COATED BOARDS

V2 boards are coated to withstand the harshest environments.

AVAILABLE WITH  
INTEGRATED BYPASS.  
MOTOR PROTECTIONS  
STILL ACTIVE


### DEGREE OF PROTECTION IP54 AND IP00

The V2 soft starters are available with IP00 protection for temperatures of 40°C (with external bypass) and IP54 for temperatures of 50°C (with built-in bypass).

### EASY SET UP OF PARAMETERS

A series of potentiometers allow a precise adjustment of parameters and protections.

LED status indicators allow an easy configuration and monitoring.

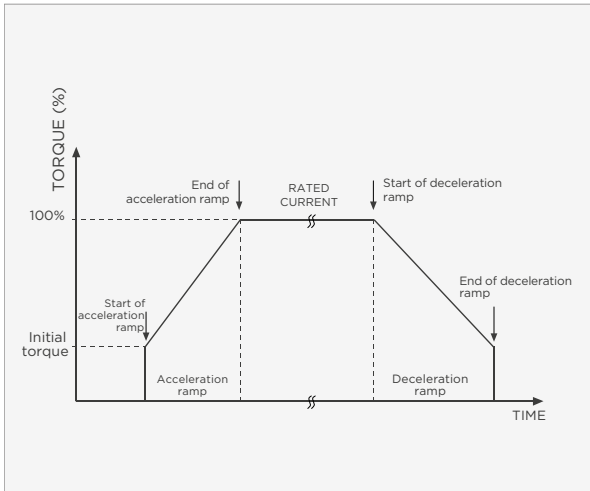


### EASY PROGRAMMING

The potentiometers adjust parameters such as current limit, overload, underload, initial torque, acceleration and deceleration ramps and overload curve.

- LED1  READY
- LED2  RUN
- LED3  OL WARNING/ UL FAULT
- LED4  OVERLOAD
- LED5  OVERTEMPERATURE
- LED6  GENERAL FAULT

### NORMAL START POTENTIOMETERS CONFIGURATION



### APPLICATIONS

Use the V2 soft starter with protections for overload, underload and for locked rotor, protecting your pumping equipment the best way possible. Furthermore, this soft starter has torque control or deceleration ramp features that will prevent water hammer.

Overall, the V2 with its soft start reduces mechanical stress to a minimum and extends the life of your facility.

The IP54 protection and coated boards is suitable for more aggressive environments.

Finally, pumps, fans, conveyors, compressors, agitators, mixers, elevators, cranes, forklifts ... are some examples of applications that can benefit from the use of this equipment.





# V2


## TECHNICAL CHARACTERISTICS

<b>INPUT</b>	Input voltage	(3 phase) 230-400V ( $\pm 10\%$ )
	Current range	9A to 75A
	Frequency	47 to 62 Hz
	Control voltage	230V $\pm 10\%$ , others under demand
<b>OUTPUT</b>	Output voltage	0 to 100% of input voltage
	Output frequency	47 - 62 Hz
	Efficiency (at full load)	>99%
<b>ENVIRONMENTAL CONDITIONS</b>	Ambient temperature	Operation: 0°C to +40°C. for IP00 Operation: 0°C to +50°C. for IP54
	Storage temperature	0°C to +70°C
	Humidity	95% at 40°C non condensing
	Altitude de-rating	>1000m, 1% each 100m; maximum 3000m
	Protection degree	IP00; IP54
	Cooling	Natural
<b>MOTOR PROTECTIONS</b>	Input phase loss	Starting current limit
	Rotor locked	Motor overload (thermal model)
	Underload	Phases imbalance
<b>SOFT STARTER PROTECTIONS</b>	General fault	V2 over temperature
<b>ADJUSTMENTS</b>	Initial torque 30 to 99%	Acceleration ramp 0 to 15 sec.
	Deceleration ramp 0 to 45 sec.	Overload 0.8 to 1.2 In
	Overload curve 1 to 10	Underload 0.2 to 0.6 In
	Underload curve 1 to 10	Current limit 1 to 5 In
<b>AUXILIARY CONTACTS</b>	2 change over relays 5A, 230Vac	Fault relay
	Instantaneous relay	
<b>LED'S INDICATIONS</b>	LED 1 Ready	
	LED 2 Start	
	LED 3 Overload warning / Underload fault	
	LED 4 Overload	
	LED 5 Overtemperature	
	LED 6 General fault	
<b>REGULATIONS</b>	CE, UL <sup>[1]</sup> , cUL <sup>[1]</sup> , cTick	


NOTE [1] On process.

### POWER WIRING CONFIGURATION

**STANDARD CONNECTION**

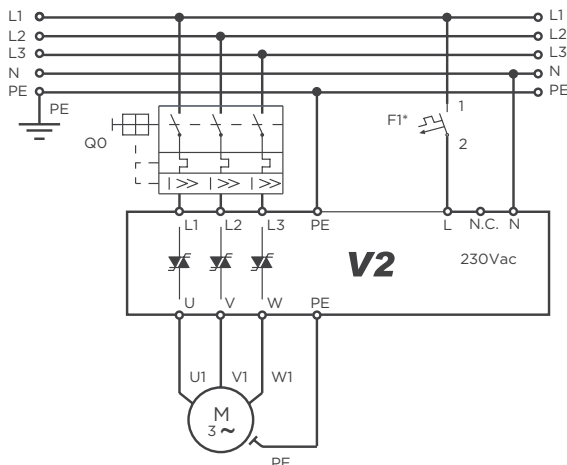

**INTERNAL BYPASS CONNECTION**

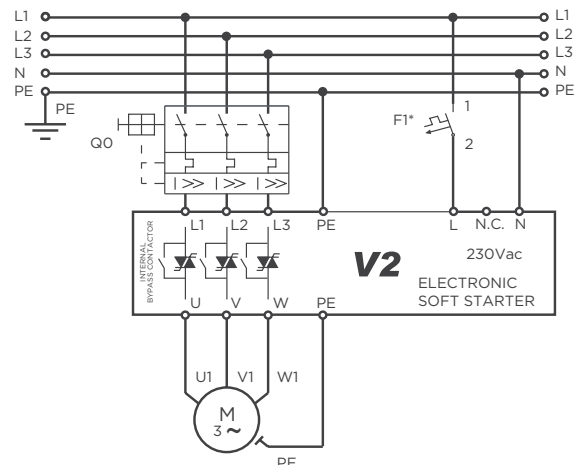


## V2 - STANDARD RATINGS


FRAME	CODE	Rated I(A)	POWER MOTOR (kW) at 230V	POWER MOTOR (kW) at 400V	PROTECTION DEGREE
1	V2009	9	2.2	4	IP00
	V2017	17	4	7.5	IP00
	V2030	30	9	15	IP00
	V2045	45	15	22	IP00
	V2060 <sup>[1]</sup>	60	18.5	30	IP00
	V2075 <sup>[1]</sup>	75	22	37	IP00
	V2009B	9	2.2	4	IP54
	V2017B	17	4	7.5	IP54
	V2030B	30	9	15	IP54
2	V2045B	45	15	22	IP54
	V2060B	60	18.5	30	IP54
	V2075B	75	22	37	IP54

NOTE [1] Includes an integrated Bypass function. The motor protection is operating all the time.

## V2 - DIMENSIONS AND WEIGHTS

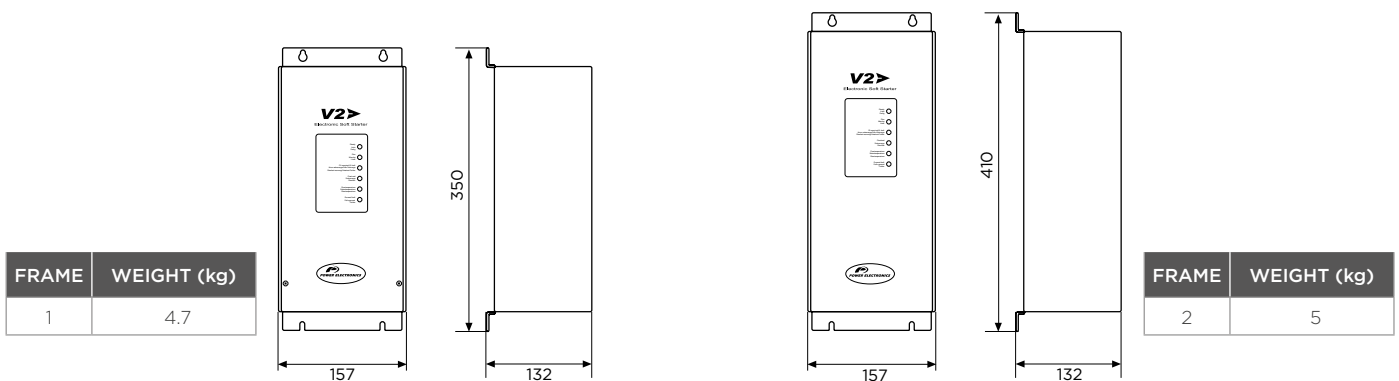

## V2 - CONTROL WIRING CONFIGURATION

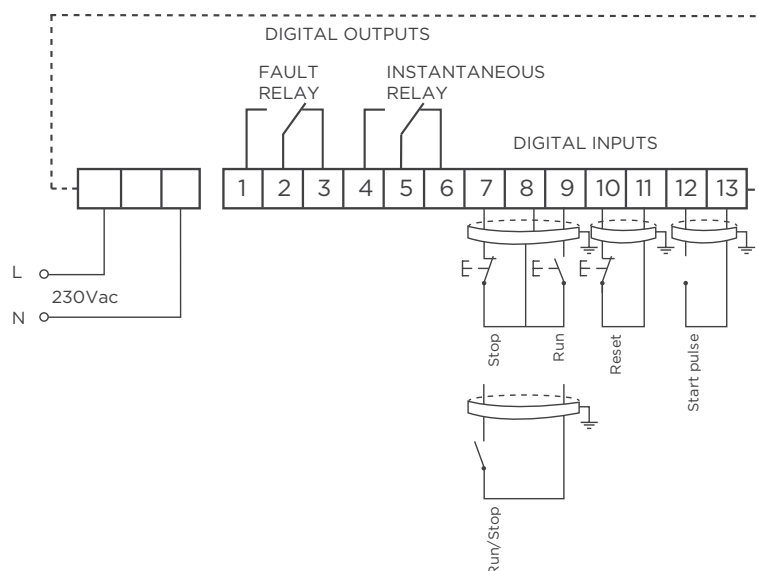

# Warranty

Power Electronics (the Seller) warrants that their INDUSTRIAL Products are free of faults and defects for a period of 3 years, valid from the date of delivery to the Buyer. It shall be understood that a product is free of faults and defects when its condition and performance is in compliance with its specification.



The warranty shall not extend to any Products whose defects are due to (i) careless or improper use, (ii) failure to observe the Seller's instructions regarding the transport, installation, functioning, maintenance and the storage of the Products, (iii) repairs or modifications made by the Buyer or third party without prior written authorization of the Seller, (iv) negligence during the implementation of authorized repairs or modifications, (v) if serial numbers are modified or illegible, (vi) anomalies caused by, or connected to, the elements coupled directly by the Buyer or by the final customer, (vii) accidents or events that place the Product outside its storage and operational specification, (viii) continued use of the Products after identification of a fault or defect.

The warranty excludes components that must be replaced periodically such as fuses, lamps & air filters or consumable materials subject to normal wear and tear.

The warranty excludes external parts that are not manufactured by the Seller under the brand of Power Electronics.

The Seller undertakes to replace or to repair, himself, at their discretion, any Product or its part that demonstrates a fault or defect, which is in conformance with the aforementioned terms of the warranty. Reasonable costs associated with the disassembly/assembly, transport and customs of equipment will also be undertaken by the Seller except in cases of approved intervention by the Buyer and/or their representative where cost allocation has been previously agreed.

In case of fault or defect, the Buyer shall notify the Seller in writing by using the following contact email: [quality@power-electronics.com](mailto:quality@power-electronics.com), of the presence of any fault or defect within 15 days of the fault or defect event. The serial number of the defective product plus a brief description of the fault must be included in the email. Failure to notify the Seller of fault or defect within this time period may result in the warranty becoming invalid.

In the event of replacement of defective Product or part thereof, the property of the Product or part shall be transferred to the Seller.

The Seller shall bear no liability for damages to property or third persons, even as manufacturer of the Products, other than that expressly provided by virtue of applicable mandatory law provisions. In any case, the Seller shall not be liable for indirect or consequential damages of whatsoever nature as, by way of example, production losses or unearned profits.

The Seller shall, at their discretion, forfeit all warranty rights of the Buyer if the total sum of the contract and payment has not been reached in accordance with the agreed conditions of the contract.

No other warranties, express or implied, are made with respect to the Products including, but not limited to, any implied warranty of merchantability or fitness for a particular purpose. In any case, the Buyer's right to damages shall be limited to a maximum amount equal to no more than the price obtained by the Seller of the faulty or defective Products.

These conditions shall apply to any repaired or replacement products. Notwithstanding the above, the replacement of a Product does not imply an extension of the term of warranty outside that of the original term.

# Contact

24H/7D TECHNICAL ASSISTANCE	HEADQUARTERS - VALENCIA - SPAIN
	C/ Leonardo da Vinci, 24 - 26 - Parque Tecnológico - 46980 - PATERNA - VALENCIA - SPAIN Tel. 902 40 20 70 - Tel. (+34) 96 136 65 57 - Fax (+34) 96 131 82 01
INTERNATIONAL SUBSIDIARIES	
AUSTRALIA	Power Electronics Australia Pty Ltd - Unit 4, 1378 Lytton Road, Hemmant Qld 4174 - Brisbane Tel. (+61) 7 3386 1993 • Email: sales@power-electronics.com.au
BRAZIL	P.E. Brazil Ltda - Domo Business - Rua José Versolato, 111 - Conjunto 1509 - Torre B - Centro São Bernardo do Campo - SP - Brasil CEP 09750-730 Tel. (+55) 11 5891 9612 - Tel. (+55) 11 5891 9762 Email: comercialbrasil@power-electronics.com
CHILE	Alonso de Córdova nº 5870, Oficina 210-211 - Las Condes - Santiago de Chile Tel. (+56) 2 3223 8916 - Email: ventas@pech.cl
CHINA	<ul style="list-style-type: none"> <li>• Power Electronics Beijing - Room 606, Yiheng Building - No 28 East Road, Beisanhuan - 100013, Chaoyang District, BEIJING - R.P. CHINA - Tel. (+86 10) 6437 9197 - Fax (+86 10) 6437 9181</li> <li>• Power Electronics Asia Ltd - 20/F Winbase Centre - 208 Queen's Road Central - Hong Kong Email: sales@power-electronics.com.cn</li> </ul>
COLOMBIA	Terminal Terrestre de Carga, Autopista vía Medellín, km. 3.5 Costado Sur, Bodega 60, Sector Cota. Bogota. Mobile +57 322 3464855, PBX +57 1 8985278
FRANCE	Power Electronics France SARL - Bibliothèque Nationale 2 - 104 Avenue de France - 75013 Paris, France Telf. +33(0)1 46 46 10 34 Ext. 1034 Email: ventesfrance@power-electronics.com
GERMANY	Power Electronics Solar GmbH - DNeuseser Strasse 15 - 90455 Nürnberg Tel. (+49) 911 99 43 99 0 - Fax (+49) 911 99 43 99 8 • Email: info@ped-deutschland.de
INDIA	Power Electronics India - N°5, Cunningham Crescent, 1 <sup>st</sup> floor. Bangalore- 560052 Tel./Fax : +91 80 6569 0489 • Email: salesindia@power-electronics.com
ITALY	Power Electronics Italia Srl. - Centro Direzionale Colleoni - Via Paracelso 16 - 20864 Agrate Brianza - Monza Tel. (+39) 039 9050899 • Email: infoitalia@power-electronics.com
JAPAN	Power Electronics Japan KK - 2-7-5, Toranomon, Minato-ku, Tokyo, Japan 105-0001 Burex Toranomon Building 3 <sup>rd</sup> Floor Tel. 03-6206-1145 • Fax 03-6206-1175 • Email: salesjapan@power-electronics.com
KOREA	P.E. Asia HQ Co - Room #305, SK Hub Primo Building - 953-1 Dokok-dong, Gangnam-gu - 135-270 - Seoul Tel. (+82) 2 3462 4656 - Fax (+82) 2 3462 4657 • Email: sales@power-electronics.kr
MEXICO	P. E. Internacional Mexico S de RL - Calz. Jinetes #197 - Las Arboledas Atizapan de Zaragoza - 52950, Mexico Tel. (+52) 55 5390 8818 • Tel. (+52) 55 5390 8363 • Email: ventasmexico@power-electronics.com
MOROCCO	Power Electronics - Ekoakua • Geea sarl , N°184 Bloc Hay EL.Massira Ait Melloul •CP 80150 • Agadir Tel: + 212 5 28 24 04 57 • Mob: (+34) 628 11 76 72 • Email: ventesmaroc@power-electronics.com
NEW ZEALAND	P.E. New Zealand Ltd - 14B Opawa Road, Waltham - Christchurch 8023 P.O. Box 1269 Christchurch 8140 Tel. (+64 3) 379 98 26 - Fax.(+64 3) 379 98 27 • Email: sales@power-electronics.co.nz
SOUTH AFRICA	Power Electronics South Africa Pty Ltd · Central Office Park Unit 5 · 257 Jean Avenue · Centurion 0157 Tel. (+34) 96 136 65 57 · Fax (+34) 96 131 82 01 • Email: salesza@power-electronics.com
SWEDEN	Stora Varvsgatan 13a, 211 75 Malmö Tel. 040-35 86 00 Fax 040-93 23 01 • Email: swedensales@power-electronics.com
TURKEY	Şerifali Mah. Edep Sok. No:30 Ümraniye • Istanbul Tel: 0 216 824 00 00 Pbx · Fax: 0 216 824 01 01 • Email: turkiyesatis@power-electronics.com
UAE	Power Electronics España S.L. DMCC Branch - P.O. Box 487282, 33 <sup>rd</sup> Floor, HDS Business Centre, Plot M1 Jumeirah Lakes Tower, Dubai, U.A.E. - Tel. +971 4 364 1200 Email: middleeast@power-electronics.com
UNITED KINGDOM	Power Electronics UK Pty Ltd · Wells House, 80 Upper Street, Islington · London, N1 ONU · 147080 Islington 5 Tel. (+44) 149 437 00 29 • Email: uksales@power-electronics.com
UNITED STATES	Power Electronics USA Inc. • 4777 N 44 <sup>th</sup> Ave • Phoenix, Arizona 85031 Tel. 602-354-4890 • Email: sales@power-electronics.us











[www.power-electronics.com](http://www.power-electronics.com)